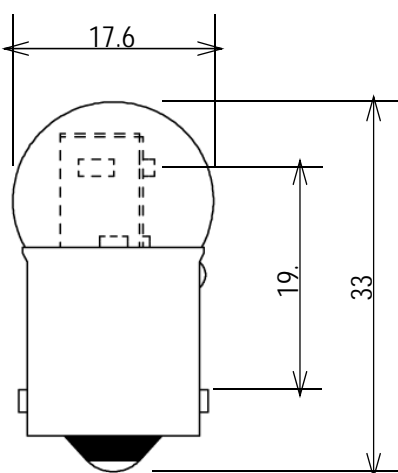


Specifications

Model	DEB-15SBA-CL
Rated Voltage	AC 12V (50/60Hz)
Operating Voltage	AC 13.5V (50/60Hz)
Operating Voltage Range	AC 11 ~ 15V
Current Consumption	130mA (at AC13.5V)
Power Consumption	1.7W (at AC13.5V)
Operating Ambient Temperature	-30 °C ~ +70 °C
Operating Ambient Humidity	Max.90%RH,No Condensation
Ambient Storage Temperature	-30 °C ~ +85 °C
Ambient Storage Humidity	Max.90%RH,No Condensation
Luminous Color	Warm White
Total Luminous Flux	45lm (at AC13.5V)
Base	BA15s
Mass	9.8g (±15%)
Compatibility	<ul style="list-style-type: none"> ▪ Series SKH-A, SKH-EA, RH-A, RK-A, WH-A, WK-A, KJS, KJ, KJT, KJPV-S, RKT, RKPV-S ※SKHB-1006 Series not included. ▪ Product Voltage AC 100V, AC 120V, AC 200V, AC 220V, AC 230V, AC 240V
Remarks	<ul style="list-style-type: none"> ▪ LED Lifespan : About 40,000hours (at 25°C/50%) ▪ The LED Bulb may vary in color, hue, or flash rate in comparison to the incandescent bulb. ▪ When replacing with LED Bulbs for KJ(B),KJS(B),KJT and KJPV-S Series, replace all bulbs at the same time. ▪ There are no contents of controlled substances exceeding the threshold for the RoHS Directive.
Dimensions	 <p style="text-align: right;">(mm)</p>

No.DEB-15SBA-CL-W18C

PATLITE Corporation